

**MIC**

## STEEL HUB-PILOTED 15° TUBELESS WHEELS



Wheel Size (Rim Dia. X Rim Width)	Part Number	Hand Holes	Wheel Offset	Disc Thickness	Bore	Bolt Holes	Valve Stem Installed	Weight (lbs)	Max Load Rating (lbs) - (psi)
17.5 x 6.75	WH17501-4	4	5.59"	0.437"	8.70" (221mm)	8	TR572	53	5675 - 125
22.5 x 8.25	WH22501-2	2	6.61"	0.437"	8.66" (220mm)	10	TR572	80.9	8000 - 120
	WH22501-5	5	6.61"	0.437"	8.66" (220mm)	10	TR572	79.4	7400 - 120
	WH22501-10	10	6.61"	0.437"	8.66" (220mm)	10	TR572	77.4	
22.5 x 9.00	WH22503-5	5	7.00"	0.630"	8.66" (220mm)	10	TR573	106.7	10000 - 130
24.5 x 8.25	WH24501-2	2	6.61"	0.437"	8.66" (220mm)	10	TR572	95.5	8000 - 120
	WH24501-5	5	6.61"	0.437"	8.66" (220mm)	10	TR572	92	7400 - 120
	WH24501-10	10	6.61"	0.437"	8.66" (220mm)	10	TR572	88.1	

## STEEL STUD-PILOTED 15° TUBELESS WHEELS

Wheel Size (Rim Dia. X Rim Width)	Part Number	Hand Holes	Wheel Offset	Disc Thickness	Bore	Bolt Holes	Valve Stem Installed	Weight (lbs)	Max Load Rating (lbs) - (psi)
22.5 x 8.25	WS22501-2	2	6.61"	0.437"	8.72" (221.6mm)	10	TR572	80.9	8000 - 120
	WS22501-5	5	6.61"	0.437"	8.72" (221.6mm)	10	TR572	79.4	7400 - 120
	WS22501-10	10	6.61"	0.437"	8.72" (221.6mm)	10	TR572	77.4	
24.5 x 8.25	WS24501-2	2	6.61"	0.437"	8.72" (221.6mm)	10	TR572	95.5	8000 - 120
	WS24501-5	5	6.61"	0.437"	8.72" (221.6mm)	10	TR572	92	7400 - 120
	WS24501-10	10	6.61"	0.437"	8.72" (221.6mm)	10	TR572	88.1	

## DEMOUNTABLE RIM 15° TUBELESS

Wheel Size (Rim Dia. X Rim Width)	Part Number	Hand Holes	Wheel Offset	Disc Thickness	Bore	Bolt Holes	Valve Stem Installed	Weight (lbs)	Max Load Rating (lbs) - (psi)
22.5 x 8.25	WD22501-	-	4.74"	-	-	-	-	67	7400 - 120

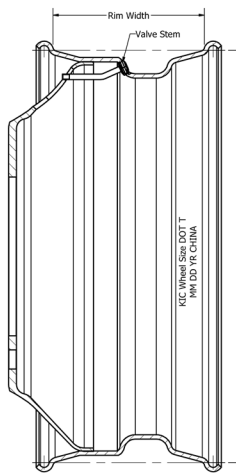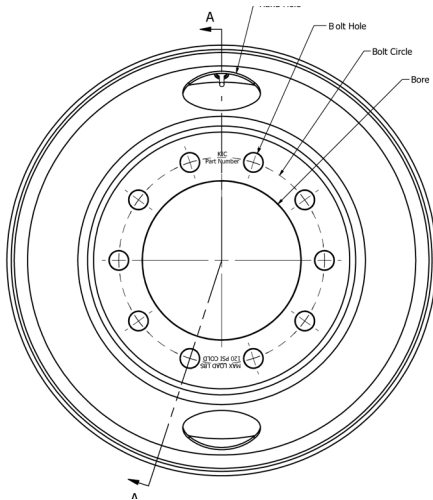

**All wheels feature E-coat primer with a powder coat top layer for superior corrosion resistance.**

**All wheels include low point of radial first harmonic markings.**

**Colors: White(std.), Gray, Silver, Black  
Other color options available**

**Contact KIC for hub and wheel bundling opportunities**

**KIC warrants wheels to be free from defects in workmanship and materials, excluding finish, for a period of FIVE (5) years from date of manufacture.**