Wheel-Guard® Separator Plates
Protect Your Investment

Protect your investment and ensure safe operation of your wheel-end system with Accuride Wheel-Guard® Separator Plates.

These extremely durable .035" injection molded black polymer plates are specially designed to be placed between the drum assembly and the wheel, and between two wheels in dual applications. They are 100% recyclable. Wheel-Guard® separator plates should not be used between the brake drum and hub.

Wheel-Guard® separator plates can be used in any wheel application to protect the wheel from wear in field service and to protect the surface appearance for aluminum and steel wheels. They are highly recommended on severe applications where excessive wear or corrosion has been identified. They are not recommended for refuse or transit bus applications, or any other high heat type applications.

Contact your Accuride sales representative for more information on how to purchase Wheel-Guards® from an authorized retailer.

Part Number	Bolt Circle	Application
790-2	8 hole - 275mm	Hub-piloted; 22mm diameter studs
100065	10 hole - 225mm	Hub-piloted; 14mm diameter studs
590-3	10 hole - 285.75mm	Hub-piloted; 22mm diameter studs
738-1	10 hole - 335mm	Hub-piloted; ISO European Mount, 22mm diameter studs
590-2	10 hole - 11¼"	Stud-piloted; ¾" diameter studs
590-1	10 hole - 11¼"	Stud-piloted; ⅞" and 1⅛" diameter studs

With Wheel-Guard

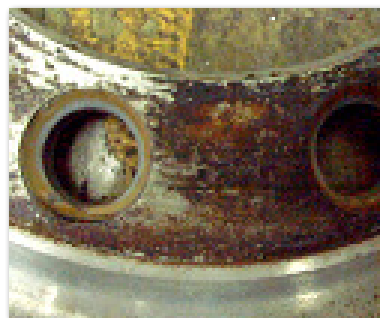Steel Wheel performance after 3 years of service using an Accuride Wheel-Guard

Aluminum Wheel performance after 3 years of service using an Accuride Wheel-Guard

Without Wheel-Guard

Steel Wheel performance after 3 years of service without using an Accuride Wheel-Guard

Aluminum Wheel performance after 1.5 years of service without using an Accuride Wheel-Guard

Your only single source for industry-leading steel and aluminum wheels.

For more information or to place an order: **(800) 823-8332 | accuridecorp.com**

Accuride | 38777 Six Mile Road, Suite 410 | Livonia, MI 48152 USA